



Serie 933*

3 Points Rim Lock

Confidentiality Notice

This document contains information that is proprietary and confidential property of ISEO Serrature Spa. By acceptance hereof, each recipient agrees to use the information contained herein only for the purpose anticipated by ISEO Serrature Spa, and not to disclose to others, copy or reproduce, any part hereof without the written consent of ISEO Serrature Spa.

The recipient agrees to return this document to ISEO Serrature Spa immediately upon request.



Serie 933* - 3 Points Rim Lock

Assumptions

■ It is a rim lock to be applied with rods and rod covers in sight, supplied complete with all accessories and fixing screws to be installed on a metal and / or wooden door with 3 locking points.

■ To be ordered separately:

- euro profile cylinder (according to the thickness door)
- defender (according to the thickness door)
- lock antidrill protection plate



Serie 933* - 3 Points Rim Lock

Features





- Lock cover, strike cover and rod covers, painted white RAL 9010
- Handle, cylinder rose, rod joints, in black nylon
- Corsa aste e catenacci 20 mm
- 2-piston oval deadbolts with the latch in the horizontal axis center
- Rods / covers can be shortened, if the rods are not cut the maximum height is 2.855 mm
- Top and bottom tips diameter 20 mm
- Replaceable cylinder with lock installed
- Handle retracts the latch and at the same time is useful for holding the door
- Very solid fixing, with self-tapping screws diam 4.8 mm of which:
 - 4 screws to fix the lock, to which 4 more can be added
 - 4 screws to fix the strike
 - 4 screws to fix the top / bottom tips
 - 2 screws to fix the upper strike
 - 4 screws to fix the floor plate
 - 4 screws to fix the rods joints
- Complete single pack with lock, rods, covers and all accessories (6 Kg)
- Multipack 2 pcs (12 Kg)


Serie 933* - 3 Points Rim Lock

Locks & accessories range

Code	Description	Note	Packaging	
933400D4	3 Points Rim Lock, Right	Adjustable rods and covers	Single pack (6 KG) Multipack 2 pcs	
933400S4	3 Points Rim Lock, Left			
043140	Lock protection plate	To be ordered separately Manganese steel	Single pack Multipack 10 pcs	
043150	Defender useful for 50 mm thicknes door	To be ordered separately Add / remove shims according to the door thickness.	Single pack Multipack 10 pcs	
Cilinders...	Cylinder size 30-60 mm for 50 mm tickness door	To be ordered separately Cylinders and sizes to be choice <i>Modular cylinders are not compatible (work in progress)</i>	---	

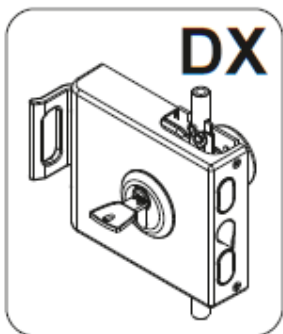


Multipack 2 pcs
(12 KG)

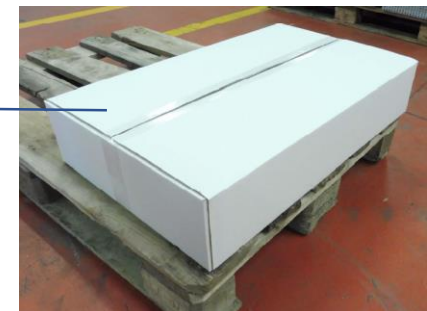

Serie 933* - 3 Points Rim Lock




Lock protection plate





■ Protection plate art. 043140 in manganese steel (anti-drill), to be ordered separately. It is inserted under the lock, before being installed.

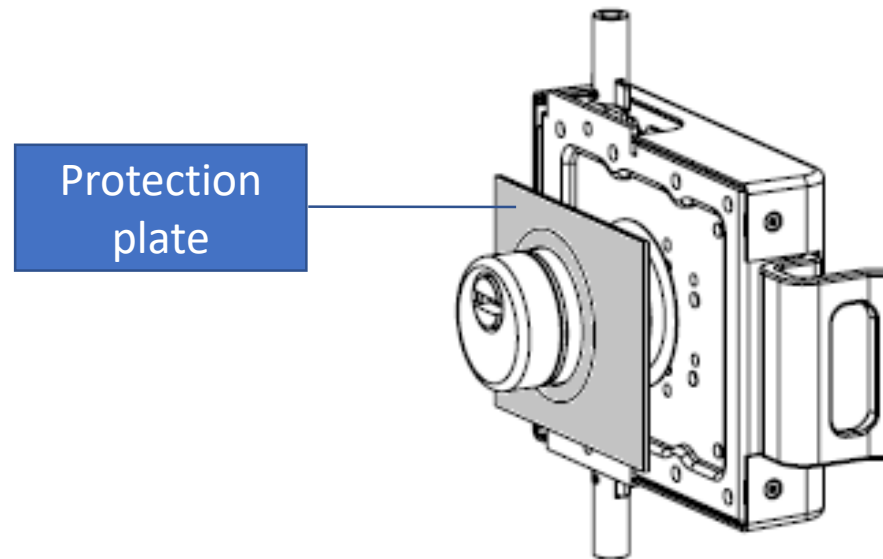

Serie 933* - 3 Points Rim Lock Defender

■ The defender art. 043150 is useful on a 50 mm door thickness. For different door thickness follow the table.

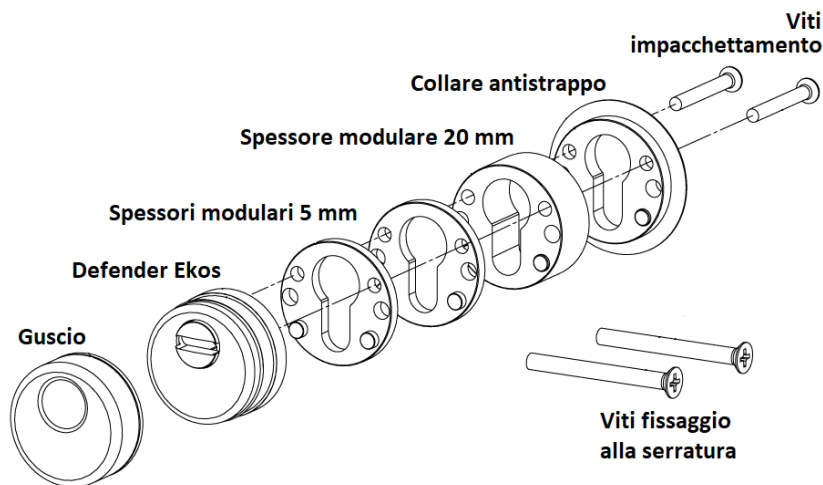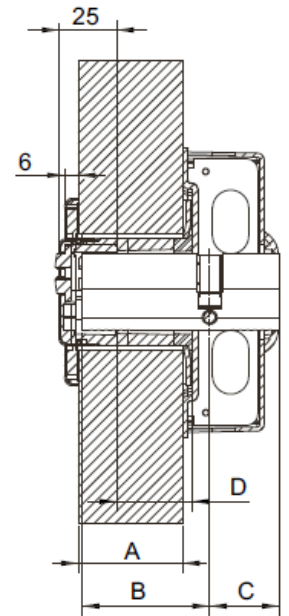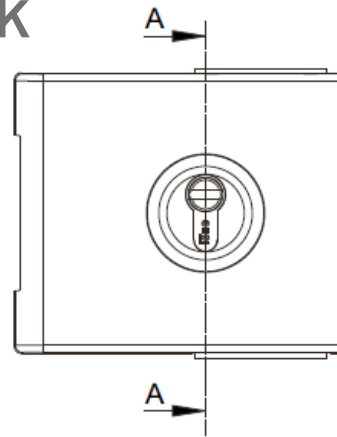

			D Componenti del defender			
A	B	C	 26,5 Defender fisso	 5 Spessore 5 mm	 20 Spessore 20 mm	 7,5 Collare fisso
Spessore della porta (mm)	Lunghezza esterna del cilindro (mm)	Lunghezza interna del cilindro (mm)				
40	50	30	1	0	1	1
45	55	30	1	1	1	1
50	60	30	1	2	1	1
55	65	30	1	3	1	1
60	70	30	1	0	2	1

Serie 933* - 3 Points Rim Lock

Photo gallery

